

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** Lampemagasinet

**Supplier's address:** Lampemagasinet AS, Vollaveien 20B, 0688 OSLO, NO

**Model identifier:** LM LED 7.5W G125 GLOBE SPIRAL KLAR 2200K 806LUMEN E27 230V DIMBAR Ra85

## Type of light source:

|                                                     |     |                                 |      |
|-----------------------------------------------------|-----|---------------------------------|------|
| Lighting technology used:                           | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E27 |                                 |      |
| Mains or non-mains:                                 | MLS | Connected light source (CLS):   | No   |
| Colour-tuneable light source:                       | No  | Envelope:                       | -    |
| High luminance light source:                        | No  |                                 |      |
| Anti-glare shield:                                  | No  | Dimmable:                       | Yes  |

## Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|


### General product parameters:

|                                                                                                                                                       |                      |                                                                                                                                                            |                        |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer                                                                         | 7                    | Energy efficiency class                                                                                                                                    | F                      |
| Useful luminous flux ( $\phi_{\text{use}}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 806 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2 200                  |
| On-mode power ( $P_{\text{on}}$ ), expressed in W                                                                                                     | 7,5                  | Standby power ( $P_{\text{sb}}$ ), expressed in W and rounded to the second decimal                                                                        | -                      |
| Networked standby power ( $P_{\text{net}}$ ) for CLS, expressed in W and rounded to the second decimal                                                | -                    | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set                                                         | 85                     |
| Outer dimensions without separate control                                                                                                             | Height               | Spectral power distribution in the range 250 nm to 800 nm, at full-load                                                                                    | See image in last page |
|                                                                                                                                                       | Width                |                                                                                                                                                            |                        |
|                                                                                                                                                       | Depth                |                                                                                                                                                            |                        |

|                                                                                                                         |      |                                       |                |  |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| gear, lighting control parts and non-lighting control parts, if any (millimetre)                                        |      |                                       |                |  |
| Claim of equivalent power <sup>(a)</sup>                                                                                | -    | If yes, equivalent power (W)          | -              |  |
|                                                                                                                         |      | Chromaticity coordinates (x and y)    | 0,502<br>0,418 |  |
| <b>Parameters for LED and OLED light sources:</b>                                                                       |      |                                       |                |  |
| R9 colour rendering index value                                                                                         | 0    | Survival factor                       | 0,90           |  |
| the lumen maintenance factor                                                                                            | 0,93 |                                       |                |  |
| <b>Parameters for LED and OLED mains light sources:</b>                                                                 |      |                                       |                |  |
| displacement factor (cos $\phi_1$ )                                                                                     | 0,50 | Colour consistency in McAdam ellipses | 6              |  |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W)     | -              |  |
| Flicker metric (Pst LM)                                                                                                 | 1,0  | Stroboscopic effect metric (SVM)      | 0,9            |  |

(a) : not applicable;

(b) : not applicable;

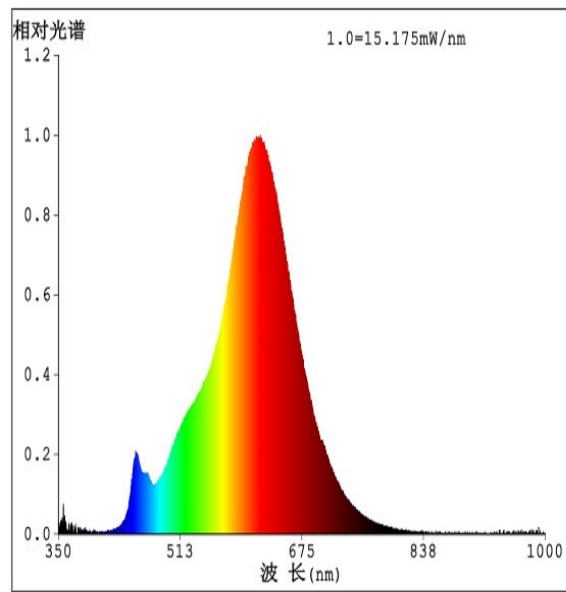

Model placed on the Union market from 08/02/2023.



**EPREL registration number:** 1609792

<https://eprel.ec.europa.eu/qr/1609792>

**Supplier:** Lampemagasinet AS (Importer)

**Website:** [www.lampemagasinet.no](http://www.lampemagasinet.no)

**Customer care service:**

**Name:** Lampemagasinet AS

**Website:** [www.lampemagasinet.no](http://www.lampemagasinet.no)

**Email:** [post@lampemagasinet.no](mailto:post@lampemagasinet.no)

**Phone:** +47 23379700

**Address:**

Vollaveien 20B  
0688 OSLO  
Norway